



Plugs for pluggable terminal blocks / EC & ESD series



EC116V

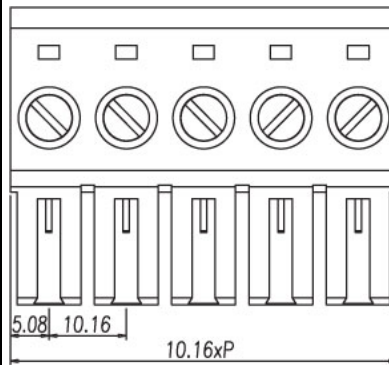

Pitch: 10.16mm

Approval	UL	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	51A / 5A	76A
Wire range		16mm ²
Solid wire (AWG)	16~6	
Stranded wire (AWG/mm ²)	16~6	
Rated surge voltage (UL/IEC/Max.)	2.5 / 3.5 / KV	
Torque (Lb-in)	15.6	
Screw	M4	
Wire strip length	8~9mm	
Pole	Cat. No.	
02	EC116V-02P	
:	:	
:	:	
10	EC116V-10P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw