


Plugs for pluggable terminal blocks / EC & ESD series



5ESDG

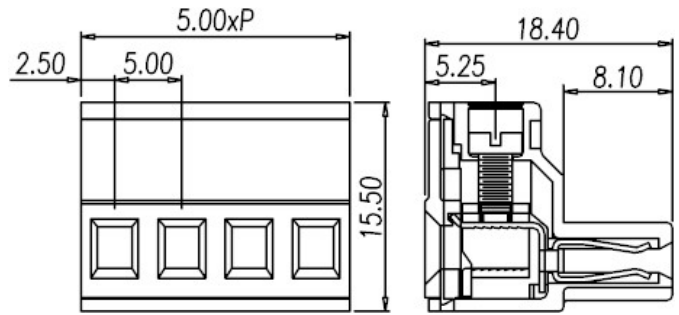

Pitch: 5.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	12A	12A
Wire range		2.5mm ²
Solid wire (AWG)	28-12	
Stranded wire (AWG/mm ²)	28-12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (Lb-in)	4	
Screw	M2.5	
Wire strip length	7~8mm	
Pole	Cat. No.	
02	5ESDG-02P	
:	:	
:	:	
14	5ESDG-14P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw