






# Mini type, simple type cage clamp terminal blocks / 144 series

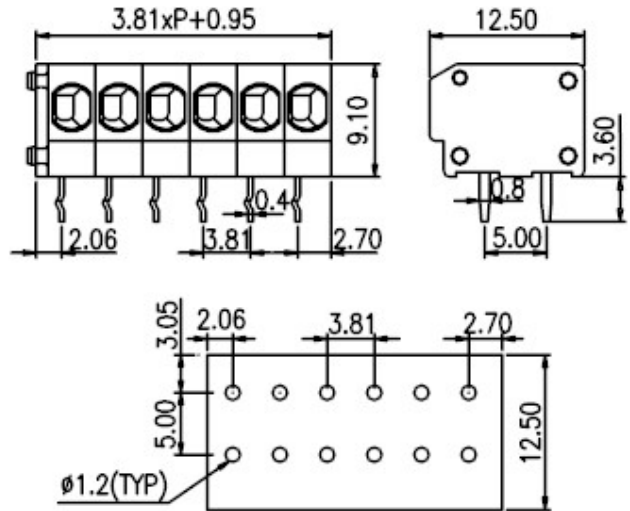

## 144R-..P1

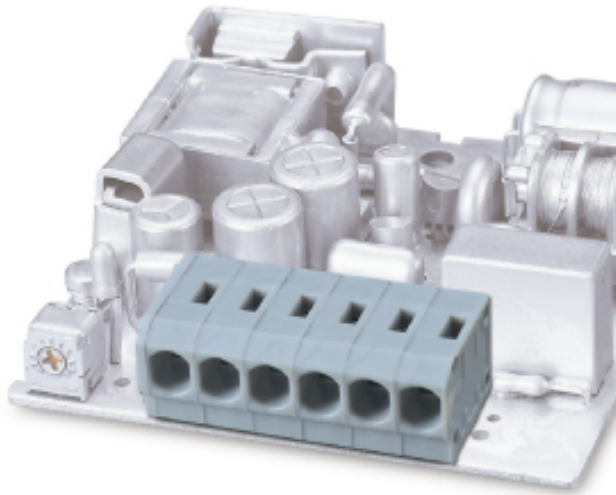

### Pitch: 3.81mm

|                                      |   |                    |
|--------------------------------------|---|--------------------|
| Approval                             |    |                    |
| Technical Data                       | UL  | IEC                |
| Rated voltage                        | 300V  | 250V               |
| Rated current                        | 10A   | 17.5A              |
| Wire range                           |   | 1.5mm <sup>2</sup> |
| Solid wire (AWG)                     | 20~14   |                    |
| Stranded wire (AWG/mm <sup>2</sup> ) | 20~14   |                    |
| Rated surge voltage (UL/IEC/Max.)    | 1.6 / 2 / 3.5 KV  |                    |
| Torque (Lb-in)                       |   |                    |
| Wire strip length                    | 6~7mm   |                    |
| End Cover                            | 144E  |                    |
| Pole                                 | Cat. No.  |                    |
| 02                                   | 144R-02P1   |                    |
| :                                    | :   |                    |
| :                                    | :   |                    |
| 24                                   | 144R-24P1   |                    |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [infor@dinkle.com.tw](mailto:infor@dinkle.com.tw)