



**Barrier Style Terminal Blocks / 0032**

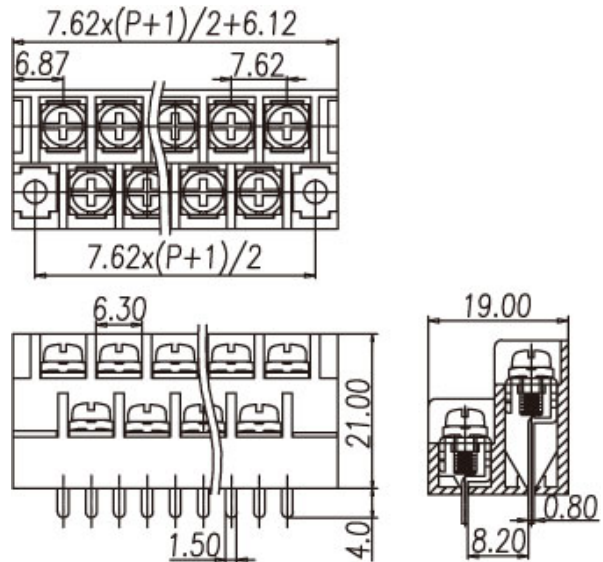


**0032-1221**

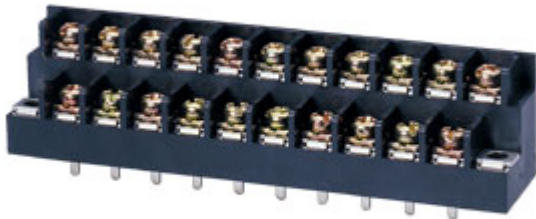

**Pitch: 7.62mm**

ORDER GUIDE

Approval		FW2
<b>Materials</b>		
Rated voltage	300V	
Rated current	15A	
Plastic Housing	PBT, UL94V-0, Black	
Terminal	Brass, Tin plated	
Screw	Steel, M3, Zinc plated	



### Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	500MΩ or more at DC500V
Wire range	22 ~ 14 AWG
Rated Torque Value	8 Kg - cm